

¿Mejor?... Imposible.



MirageMEXICO


mirage.mx



PLATINUM X



ESPECIFICACIONES		12k-115	12k-220	18k-220	24k-220
VOLTAJE DE OPERACIÓN	Ph / V~ / Hz	1/ 115/ 60	1/ 230/ 60	1/ 230/ 60	1/ 230/ 60
CAPACIDAD DE ENFRIAMIENTO	BTU/h	12,000	12,000	18,000	26,000
	W(t)	3,500	3,500	5,280	7,620
CONSUMO PROMEDIO	W	950	1,000	1,600	2,000
CORRIENTE PROMEDIO	A	8.5	4.5	7.7	9.6
CAPACIDAD DE CALEFACCIÓN	BTU/h	12,500	12,500	19,000	26,000
	W(t)	3,665	3,665	5,570	7,620
CONSUMO PROMEDIO	W	910	9,80	1,510	1,980
CORRIENTE PROMEDIO	A	8.5	4.5	7.7	9.6
CIRCULACIÓN DE AIRE	m ³ /h	550	550	850	950
REMOSION DE HUMEDAD	l/h	1.20	1.20	1.70	1.80
NIVEL DE RUIDO					
EVAPORADOR	dB(A)	33	33	35	37
CONDENSADOR	dB(A)	52	52	56	56
TIPO DE COMPRESOR	MIRAGE TURBO INFINITY / Fixed speed Rotary				
MOTOR VENTILADOR					
INTERIOR Velocidad	H/M/L (rpm)	1350/1250/1100/950	1350/1250/1100/950	1350/1200/1050/900	1350/1150/1000/850
CAPACITOR	(µF)	4	1	1.5	2.5
EXTERIOR Velocidad	(rpm)	850	850	915	815
CAPACITOR	(µF)	7	2	2.5	3.5
ABANICO					
TURBINA DIAMETRO/LONGITUD (mm)		Φ85×596	Φ85×596	Φ98×710	Φ98×765
DIAMETRO ASPA (mm)		400	400	400	460
DIMENSIONES					
EVAPORADORA (AnxAlxProf) (mm)		790X265X177	790X265X177	940X298X200	1007X315X219
C/EMPAQUE (AnxAlxProf) (mm)		873X251X370	873X251X370	1013X383X300	1076X398X328
CONDENSADORA (AnxAlxProf) (mm)		776X540X320	776X540X320	848X540X320	913X680X378
C/EMPAQUE (AnxAlxProf) (mm)		823X595X358	823X595X358	881X595X363	997X740X431
PESO BRUTO (indoor / outdoor)	(kg)	12/35	12/35	17/44	20/55
CARGA DE REFRIGERANTE	(kg)	R22/0.62/0.78	R22/0.55/0.60	R22/1.0/1.24	R22/1.20/1.35
CARGA ADICIONAL	(g/m)	15/20	15/20	15/20	15/20
DIAMETRO DE TUBERIA	(Pulg)	1/2 - 1/4	1/2- 1/4	1/2- 1/4	5/8- 1/4

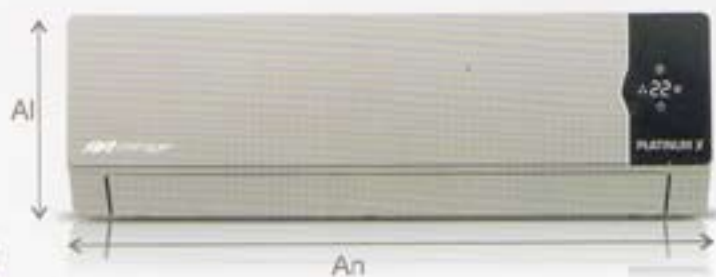

mirage.mx

